

ISO 4014 similar to DIN 931


Hexagon head bolts

Hexagon head | with body

Steel 5.6 | zinc-plated | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22

There is a separation into product classes A and B, with the data sheet showing the largest range of values. For more information, see the technical details of the selected article.

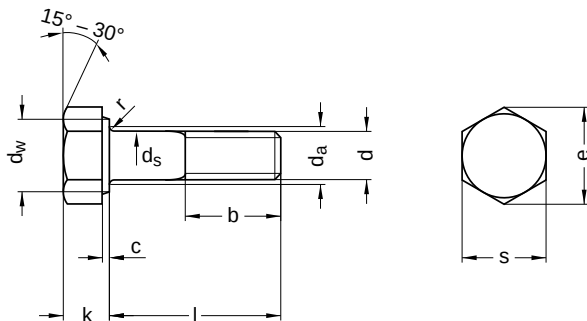

Diameter (d)	b			c		d _a	d _s	d _w
	l up to 125	l up to 200	l longer than 200	min.	max.	max.	max.	min.
M12	30	36	49	0.15	0.6	13.7	12	16.47
M16	38	44	57	0.20	0.8	17.7	16	22.00
M20	46	52	65	0.20	0.8	22.4	20	22.70
M24	54	60	73	0.20	0.8	26.4	24	33.25

Diameter (d)	e	k		r	s		Pitch (P)	Tool size	
	min.	nominal size	min.	max.	min.	max.			
M12	19.85	7.5	7.21	7.79	0.6	18	17.57	1.75	SW 18
M16	26.17	10.0	9.82	10.18	0.6	24	23.16	2.00	SW 24
M20	32.95	12.5	12.28	12.72	0.8	30	29.16	2.50	SW 30
M24	39.55	15.0	14.78	15.22	0.8	36	35.00	3.00	SW 36

nominal size	Length (l)	
	min.	max.
50	48.75	51.25
60	58.50	61.50
65	63.50	66.50
70	68.50	71.50
75	73.50	76.50
80	78.50	81.50

nominal size	Length (l)	
	min.	max.
90	88.25	91.75
100	98.25	101.75
120	118.25	121.75
125	123.25	126.75

All technical data refer to the measure mm



ISO 4014 similar to DIN 931

Hexagon head bolts

Hexagon head | with body

Steel 5.6 | zinc-plated | Cr(VI)-free | Metric thread

Diameter (d)	Length (l)									
	50	60	65	70	75	80	90	100	120	125
M12	●	●	●	●	●	●	●	●	●	●
M16			●			●				
M20					●	●				●
M24								●		

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

